

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
24 June 2004 (24.06.2004)

PCT

(10) International Publication Number  
**WO 2004/053291 A1**

(51) International Patent Classification<sup>7</sup>: **E21B 43/38**

(21) International Application Number:  
PCT/EP2003/013305

(22) International Filing Date:  
26 November 2003 (26.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0228968.4 12 December 2002 (12.12.2002) GB

(71) Applicant (for FR only): **SERVICES PETROLIERS  
SCHLUMBERGER** [FR/FR]; 42, rue Saint-Dominique,  
F-75007 Paris (FR).

(71) Applicant (for all designated States except BF, BJ, BR, CA,  
CF, CG, CI, CM, CN, CZ, FR, GA, GB, GN, GQ, GW, IN,  
JP, LT, MA, ML, MR, NE, NL, OM, SD, SN, TD, TG, TN,

TR, TT, US, VN): **SCHLUMBERGER TECHNOLOGY  
B.V.** [NL/NL]; Parkstraat 83-89, NL-2514 JG The Hague  
(NL).

(71) Applicant (for GB, JP, NL only): **SCHLUMBERGER  
HOLDINGS LIMITED** [—/—]; P.O. Box 71, Craigmuir  
Chambers, Road Town - Tortola (VG).


(71) Applicant (for CA only): **SCHLUMBERGER CANADA  
LIMITED** [CA/CA]; 24th Floor, Monenco Place, 801 6th  
Avenue SW, Calgary, Alberta T2P 3W2 (CA).

(71) Applicant (for BF, BJ, CF, CG, CI, CM, CZ, GA, GN, GQ,  
GW, IN, LT, MA, ML, MR, NE, SN, TD, TG, TN, VN only):  
**PETROLEUM RESEARCH & DEVELOPMENT N.V.**  
[NL/NL]; De Ruyterkade 62, Willemstad, NL-Curacao  
(NL).

(71) Applicant (for CN only): **SCHLUMBERGER OVER-  
SEAS S.A.** [PA/PA]; 8 Calle Aquilino de la Guardia,  
Panama City, Panama (PA).

[Continued on next page]

(54) Title: DOWNHOLE SEPARATION OF OIL AND WATER

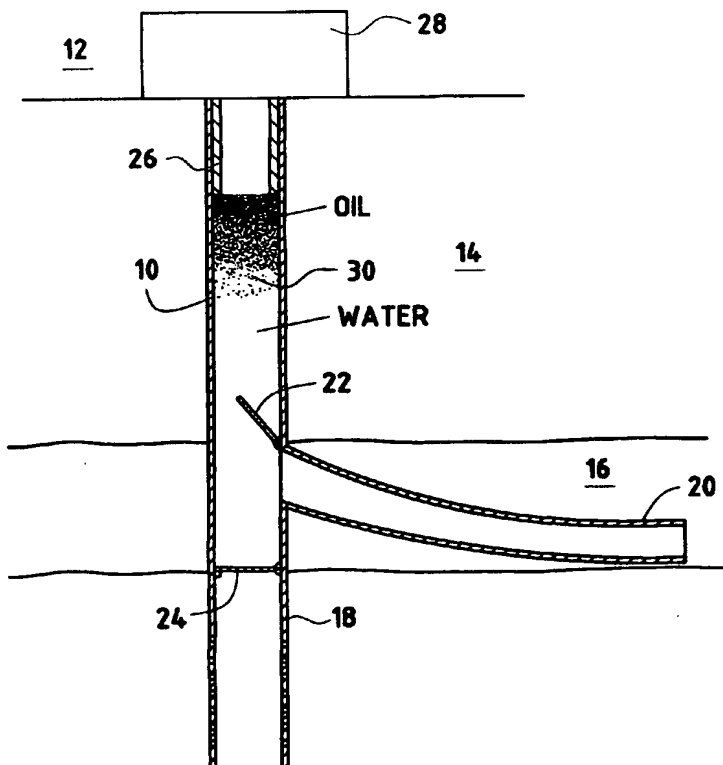

(57) Abstract: A well for producing oil from an underground formation, comprises a vertical section (10) extending from the surface to a depth below the oil-producing formation (16); a sidetrack or perforated interval (production zone) (20) extending from the vertical section into the oil-producing formation; and a valve (22), located in the well, and operable to prevent flow of fluid from the vertical section into the production zone and a valve (24) to prevent flow of fluid from the portion (18) below the production zone into the production zone (20) or into the vertical section (10) above the production zone. A method of producing oil from the well comprises allowing oil and water to flow into the well via the production zone until the hydrostatic pressure in the well balances the formation pressure allowing the oil and water in the vertical section of the well to separate under gravity forcing the separated oil and water back down the well and operating the valve such that substantially no fluid is forced into the production zone, and water is forced into the underground formation below the oil-producing formation; and allowing oil and water flow to recommence from the production zone.

BEST AVAILABLE COPY



(71) **Applicant** (*for OM, SD, SY, TR only*): **SCHLUMBERGER OILFIELD ASSISTANCE LIMITED** [PA/PA]; 8 Calle Aquilino de la Guardia, Panama City, Panama (PA).

(71) **Applicant** (*for BR only*): **SCHLUMBERGER SURENCO S.A.** [PA/PA]; 8 Calle Aquilino de la Guardia, Panama City, Panama (PA).

(71) **Applicant** (*for TT only*): **SCHLUMBERGER SERVICES LIMITED** [—/—]; P.O. Box 438, Tortola (VG).

(71) **Applicant** (*for EG only*): **SCHLUMBERGER SEACO INC.** [PA/PA]; 8 Calle Aquilino de la Guardia, Panama City, Panama (PA).

(72) **Inventors; and**

(75) **Inventors/Applicants** (*for US only*): **MANIN, Yves** [FR/FR]; 4, Grand Place, F-92350 Le Plessis Robinson (FR). **REZGUI, Fadhel** [FR/FR]; 12, boulevard Desgranges, 6, Résidence des Pépinières, F-92330 Sceaux (FR). **THERON, Bernard** [FR/FR]; 7, avenue Jean Monnet, F-91300 Massy (FR).

(74) **Agent**: **HYDEN, Martin**; Etudes et Productions Schlumberger, 1, rue Henri Becquerel - BP 202, F-92142 Clamart Cedex (FR).

(81) **Designated States** (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) **Designated States** (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## DOWNHOLE SEPARATION OF OIL AND WATER

The present invention relates to methods for constructing and operating oil wells, in particular to such methods which allow the downhole separation of oil and water produced from the formation, and artificial lift of these fluids to the surface.

Because of the manner in which oil is formed in underground formations, it is very common that, after an initial water-free production, when oil is produced from a well, a certain amount of water is also produced. When this occurs, it is necessary to separate the oil from the water, the water being disposed of, typically by re-injection into the earth formations. Separation of oil from water usually takes place at the surface and numerous devices are available for this purpose. These devices often operate using gravity or a cyclone principle. The exact nature of the separation device will depend on the ratio of oil and water, and the total volume of fluid produced. This ratio will usually change over the life of a well since water is usually less viscous than oil and so moves more easily through the formations and into the well. Typically, the more water there is produced from a well, the more complex, expensive and energy-consuming the surface separation equipment is. Also, a large power requirement will involve further expense installation of power supplies and of the ongoing power supply to operate the installation. This can be increased significantly when the well is in a remote or difficult to reach location.

WO 01/44620 describes an installation for producing de-watered oil from a well. US 6,279,651 describes an installation for managing the production from complex wells having multiple sidetracks, involving the use of operable valves to control production.

Another problem that is encountered in the production of oil from wells is that of low formation pressure. In most cases, the pressure of fluid (gas, oil and water) in the formation is greater than the hydrostatic pressure of the fluid column in the well above the zone of the well from which the fluids are produced. Consequently, the fluids will flow naturally to the surface. However, in many cases the formation pressure is insufficient to flow the fluids all the way to the surface, often due to the presence of water leading to a high hydrostatic load. At some point, the flow of fluids

into the well creates a fluid column that creates a hydrostatic pressure that exactly balances the formation pressure at the point of the well where the fluids enter. Therefore no further flow can take place and the well is said to have killed itself. The low formation pressure might be due to the natural state of the reservoir, the concentration of water in the produced fluids, or might be due to depletion of fluids in the reservoir following long periods of production. In either case, it is necessary to provide some form of assistance to flow the fluids to the surface. One such form is the use of pumps. A pump located at the surface can only produce a maximum theoretical pressure drop of 1 bar which is approximately the equivalent of 10m vertical depth from which fluid can be raised. If the formation pressure is insufficient to bring the surface of the fluid column to within 10m of the surface, it is necessary for the pump to be located at the bottom of the well. Such pumps are known as electric submersible pumps (ESP's) and are immersed in the well fluids and provided with electrical power from the surface via a cable running down the well. The power requirement of an ESP is typically in the order of hundreds of kW but significant power losses in the well means that the supply at the surface must be much larger than this. The pumps themselves are often long, in the order of 10 – 20m, and currently have a reliability of only 6 – 12 months between failures. Following failure, the ESP must be removed from the well and repaired or replaced; an expensive and time consuming operation during which the well cannot produce and personnel and equipment must be brought to the well site, all of which incurs expense.

The two problems identified above often go hand-in-hand, low formation pressures accompanied by large amounts of water produced from the formation. Thus the cost of production is even higher, since the pumps are used to pump a mixture of oil and water of only the oil has value but which must be separated to realise this value.

The present invention aims to provide techniques for well construction and operation that potentially address these problems.

A first aspect of the invention provides a well for producing oil from an underground formation, comprising: a first zone extending through the underground formation containing oil and into which formation fluids including oil are allowed to flow; a second zone extending away from the first zone and into which fluids from the first

zone can pass; a third zone into which water passes extending away from the first zone; a first valve located in the well between the first zone and the second and third zones, operable so as to allow formation fluids to pass into the second zone, and to prevent fluids from the second and/or third zones from passing into the first zone; and a second valve located in the well operable to allow water to pass into the third zone, and to prevent flow of water from the third zone into the first and/or second zones.

The second and third zones can be defined by a vertical section of the well, at least part of which extends from above the first zone to the surface.

The well according to the invention can be defined by the completion hardware installed in the well. For example, the second zone can comprise a casing or large production tubing extending from the first zone to the surface, or production tubing extending through an upper part of the well to the surface. The third zone can be defined by a tubing extending from above the first zone to the surface, either through the casing or large production tubing defining the second zone, or parallel to the production tubing defining the second zone extending through the upper part of the well.

A well according to the invention can also be defined by the manner of well construction, comprising: a vertical section, defining the second and third zones, extending from the surface to a depth below the oil-producing formation; a sidetrack or a production interval, defining the first zone, extending from the vertical section into the oil-producing formation.

The vertical section of the well preferably extends into a water-containing formation immediately below the oil-producing layer. While the term "vertical" is used here, it will be appreciated that it is not essential that the section be truly vertical, deviations from vertical typical in normal, non-directional, drilling being permissible. The important feature is that the vertical section extends from the surface to below the oil-producing formation.

The sidetrack will typically be much more deviated from vertical than the vertical section and may include a section that is horizontal or close thereto. Again, the well

trajectory and deviation will be in line with what is normally considered acceptable in "horizontal" wells that extend laterally through producing reservoirs. A conventional perforated interval can be used to allow produced fluids to enter the well.

By providing the third zone which extends away from the oil-producing formation, it is possible to use the second zone of the well as a separator while avoiding filling the first zone with water and interfering with future oil production.

A second aspect of the invention provides a method of producing oil from a well as claimed in any preceding claim, comprising: allowing oil and water to flow into the well from the formation surrounding the first zone into the second zone until the hydrostatic pressure of the oil and water in the well balances the formation pressure of the underground formation containing oil such that further flow into the well ceases; allowing the oil and water in the second zone to separate under gravity so as to produce (i) a lower layer of water, and (ii) an upper layer of oil having its upper surface below the well surface and its lower surface above the first zone; forcing the separated oil and water in the second zone back down the well and operating the first valve such that substantially no fluid is forced into the first zone, and water is forced into the third zone; and allowing oil and water flow to recommence from the first zone.

Preferably, separated oil and water is forced down the well until the oil water interface is close to the lower end of the second zone. The steps of flowing, separating, forcing back are typically repeated until oil flows from the well at the surface. The step of forcing separated oil and water down the well can be performed by applying pressure to the second zone from the surface, for example by pumping a lighter fluid such as oil or gas into the second zone.

Where the well is defined by its manner of completion, the method can comprise producing the oil and water into the casing or production tubing, allowing the water and oil to separate therein and forcing the separated fluids back down the casing or tubing such that water is forced into the production tubing defining the third zone so as to be produced at the surface.

Where the well is defined by its manner of construction, the method can comprise allowing oil and water to flow into the well via the sidetrack until the hydrostatic pressure of the oil and water in the well balances the formation pressure of the oil-producing formation such that further flow into the well ceases; allowing the oil and water in the vertical section of the well to separate under gravity so as to produce (i) a lower cushion of water, at least part of which is located in the part of the vertical section below the oil-producing formation, and (ii) an upper cushion of oil having its upper surface below the well surface and its lower surface above the sidetrack; forcing the separated oil and water back down the well and operating the valve such that substantially no fluid is forced into the sidetrack, and only water is forced into the underground formation below the oil-producing formation; and allowing oil and water flow to recommence from the sidetrack.

It is preferred that the separated oil and water are forced back down the well until the lower surface of the oil layer is close to or level with the sidetrack.

The steps of flowing, separating, forcing back are repeated until oil flows naturally from the well at the surface or until it can be pumped from the well.

By allowing the oil and water to separate and then producing the water at surface or re-injecting water into the formation below the oil-producing formation, the weight (explanation: the height is always the same, this is the sidetrack depth) of the fluid column in the well above the sidetrack is reduced and consequently the hydrostatic pressure in the producing formation in the first zone is reduced. This allows more fluid (oil + water) to flow from the oil-producing formation into the first zone. Also, the fact that most of the fluid column is now oil means that the column has a density that is lower than the original mixture (oil being less dense than water) and so the hydrostatic pressure will be even lower than that caused merely by reducing the height of the liquid column before recommencing flowing. Thus, it will be possible to raise the top of the column closer to the surface and after some repetitions can allow either natural flow from the well, or easy pumping from the surface.

Also, by allowing the oil to separate in the well, the fluids produced at the surface will have little or no water content and so require less separation.

The time for which the oil and water mixture is allowed to separate may be the average time for a bubble of oil to rise from the middle of the mixed phases, to the middle of the separated oil phase. This time can be determined from the volume fractions of water and oil in the mixture and the bubble size of the oil. The volume fractions can be obtained from surface testing or production logging. The bubble size is typically a function of the volume fraction of oil and can be obtained either by direct measurement downhole using suitable production logging tools, or by use of a predetermined relationship established between oil volume fraction and bubble diameter. Typical separation times will be of the order of a few minutes.

The present invention will now be described by way of examples, with reference to the accompanying drawings, in which:

Figure 1 shows a well in accordance with one aspect of the invention;

Figure 2 shows the well of Figure 1 in a first phase of operation;

Figure 3 shows the well of Figure 1 in a second phase of operation;

Figure 4 shows the well of Figure 1 in a third phase of operation;

Figure 5 shows the well of Figure 1 in a fourth phase of operation;

Figure 6 shows an alternative well configuration in accordance with the invention in a first phase of operation;

Figure 7 shows the configuration of Figure 6 in a second phase of operation;

Figure 8 shows another alternative well configuration in accordance with the invention in a first phase of operation; and

Figure 9 shows the configuration of Figure 8 in a second phase of operation

Figure 1 shows a well according to one aspect of the invention. The well comprises a vertical section 10, which extends downwardly from the surface 12 (or if in an offshore environment, the sea bed) and passes through underground formations 14, including an oil-bearing formation 16 and terminates in a section 18 below the oil-bearing formation 16. As is common in this field, it is not essential that the well be completely vertical, normal degrees of deviation being acceptable. The well has a lateral production branch 20 extending from the vertical section 10 into the oil-bearing formation 16. As is common with such horizontal or lateral branches, the track of the branch 20 is not completely horizontal but angles downwardly away from



the vertical section 10. This branch 20 can be completed in the normal manner for production, for example, with slotted liners or the like, or open-hole ("barefoot"). A valve 22 is located at the end of the lateral branch 20 and operates so as to prevent flow from the vertical section 10 into the lateral branch 20. A further valve 24 is located in the lower section 18 immediately below the lateral branch 22 and acts to prevent flow from the lower section 18 in to the upper part of the well. The top section of the well is completed with production tubing 26 in the normal manner. A production unit 28 is located at the surface to allow fluids to be removed from the well, possibly by pumping and to allow gas or other fluids to be injected into the upper part of the well. The surface unit will also include power supplies, separators, compressors and other such surface equipment.

Figure 2 shows a first phase of operation of the well. In this phase, the valve from the lateral branch 20 is open and the valve 24 into the lower section closed. Formation fluids are produced into the lateral branch 20 ( the first zone) in the normal manner. The fluids comprise a mixture of oil and water and will flow into the well until the hydrostatic head of the column of fluids in the vertical section (the second zone) 10 balances the pressure of the fluids in the formation 16. At this point the production is naturally killed but the upper surface of the fluids in the well is still too far below the surface to be pumped from the surface.

The second phase of operation is shown in Figure 3. In this phase, the fluids in the well are allowed to separate under the effect of gravity, the oil rising to the top as it is less dense than the water. The time for substantially all of the oil to separate from the water will depend on a number of factors that are discussed in more detail below. Once it is determined that separation is effectively complete, operation progresses to the third phase as shown in Figure 4.

In the third phase, pressure is applied to the top of the fluid column, for example by the use of pressurised nitrogen gas. At the same time, the valve 22 into the lateral branch 20 is closed and the valve 24 into the lower section of the well (the third zone) 18 opened. The pressure of the gas forces the fluids back down the well and the water is re-injected into the formation below the producing interval 16. Since the valve 22 is closed, no water will enter the lateral branch 20 although some separation will take

place due to the inclination to horizontal of the branch resulting in a sump of water at the distal end of the branch. Injection is continued until the oil water interface 30 reaches the level of the valve 24 at the latest. At this point, re-injection is stopped.

In the fourth phase of operation, as shown in Figure 5, the pressure on the top of the fluid column is released and the branch 20 allowed to recommence production. At this stage, the valve 22 is open to allow produced fluids (oil and water) into the upper vertical section of the well. Production of fluids will recommence because the height of the fluid column in the vertical section is less than when the well killed itself and so the hydrostatic pressure will be lower than the formation pressure. However, in this case, the fluid in the vertical section of the well is less dense than before since it comprises (mainly) oil rather than a mixture of oil and water. Therefore, the resulting column will rise further up the well before the hydrostatic pressure again kills production.

By repeating the phases of separation, re-injection and production, the density of the fluid column in the vertical section of the well is progressively reduced until the top of the column reaches the top of the well, or is sufficiently close to allow production to the surface to take place. Production of oil from the well will continue until the amount of water in the vertical section of the well increases to a level at which the hydrostatic head again kills the well, following which the cycle of separation, re-injection and production is repeated.

This method of operation has a number of advantages over previously proposed methods of assisted production from wells. First, all of the powered equipment is located at the surface, making power supply and maintenance easier and cheaper. Second, the water content of the fluids produced from the well is reduced, thus necessitating the use of simpler and cheaper separation equipment. Third, the re-injection of the separated water into the formation below the producing interval helps to maintain reservoir pressure and avoid many of the problems of disposal of produced water. These and other advantages make the method of the invention particularly applicable to wells in reservoirs with weak or falling pressures that would otherwise require the use of expensive downhole pumps in order to extract oil therefrom. While the above example has been described using a single lateral branch,

it is also possible to use multiple lateral branches, in the same or different producing intervals. The can be formed when the well is originally drilled, or later in the well's life by returning with drilling equipment for use in an existing well.

The following example is given to demonstrate the manner in which the invention can be used. For a well as shown in Figure 1, the following parameters are given:

#### Well Geometry

Vertical Section (10) ID	15cm
Tubing (26) ID	7.5cm
Depth to bottom of Tubing (26)	1800m
Depth to Horizontal Branch (20)	2000m
Depth of Vertical Section (18) below Branch	30m
Horizontal Length of Branch (20)	300m
Thickness of Producing Interval (16)	6.5m

#### Reservoir Properties

Max Water Cut*	80%
Max Drawdown in Horizontal Branch (20)**	100psi
Fracture Pressure in Lower Vertical Section (18)**	3100psi
Reservoir Pressure*	2700psi
Horizontal Permeability*	300mD
Vertical Permeability*	100mD
Porosity*	0.2
Oil Viscosity*	0.001Pa.s
Water Viscosity*	0.0005Pa.s
Oil Density*	0.8g/cc
Water Density*	1g/cc

\* Property obtained from open-hole or cased-hole logging measurements, fluid sampling, etc.

\*\* Calculated from known relationships, e.g. Kuchuck F.J. & Goode P.A. "Pressure Transient Analysis & Inflow Performance for Horizontal Wells" 1988 SPE Technical Conference, or Fundamentals of Reservoir Engineering (L.P. Dave) Elsevier 1978 (Oilwell Testing, p. 159).

In order to observe the maximum drawdown, the production rate (as found in the first and fourth phases described above) is established at 1212m<sup>3</sup>/day. The maximum drawdown will typically be established to avoid collapsing the formation and to stay below the bubble point for the oil. The injection rate for the third phase is set at

2461.916m<sup>3</sup>/day in order not to exceed the fracture pressure of the formation. In certain circumstances, it may be desirable to exceed this pressure and fracture the formation in order to improve the injection of water into the formation.

The duration of separation in the second phase is calculated using Stoke's law and is determined as the time taken for an oil bubble to travel the average distance during separation. This distance is assumed to be the distance from the half height of the water column (when fully separated) to the half height of the oil column (when fully separated). The heights of the fluid columns can be calculated knowing the water cut and well geometry. The time taken for a bubble to travel the average distance depends on the relative densities and viscosities of the oil and water and the size of the bubble. The former are obtained from direct measurement or from standard data, the latter is obtained by direct measurement of bubble size using production logging tools, or from flow loop data relating bubble size to water cut.

Applying these parameters to the well geometry given above gives the following durations:

Production Duration (1 <sup>st</sup> & 4 <sup>th</sup> Phases)	839s
Separation Duration (2 <sup>nd</sup> Phase)	2454s
Re-injection Duration (3 <sup>rd</sup> Phase)	413s
Cycle Duration	3706s

The daily oil production in this case is 55m<sup>3</sup>.

The geometry and operating parameters can be varied to suit specific well requirements. For example, the well can be defined by the manner in which it is completed (as opposed to the manner in which it is constructed, as described above). Figures 6 and 7 show a further embodiment of the invention. In this case, the well is completed with casing (or large production tubing) 30 to the surface and a valve 22 is located above the producing zone 16 similar to the embodiment defined above, except that in this case, there is no sidetrack, produced fluids entering the main well in the conventional manner via perforations. Tubing 32 is installed in the well connecting the lower portion of the upper (second) zone, above the valve 22, to the surface. Figure 6 shows the well in a first stage of operation. In this stage, the valve 22 is open

and water and oil flow from the production zone (first zone) into the casing (second zone). The tubing 32 is full of water and a further valve 34 located at its lower end closed to prevent water falling back into the well. As before, production will continue until the hydrostatic head balances the formation pressure, at which time production stops.

Figure 7 shows the second phase of operation. In this phase, the oil and water have been allowed to separate in the casing, as before, the valve 22 is closed and the further valve 34 in the tubing 32 opened. Pressure is applied to the top of the separated fluids (again , as before) but in this case, the separated water is forced into the tubing 32 and is produced at the surface. Application of pressure is stopped before the oil/water interface reaches the end of the tubing 32. At this point production is recommenced from the production zone with the valve 22 opened and the further valve 34 closed, as in the first phase. These phases are alternated to obtain production to surface in a similar manner to that described above.

Figures 8 and 9 show a different embodiment of the invention using a well completion approach. In this case, two production tubings 31, 32 are installed in the well, the upper part of the casing being sealed by a packer 36 at the lower end of the tubings 31, 32. The mixed oil and water are produced through a first production tubing 31 in which they are separated as before. The second tubing 32 operates in the same manner as described in relation to Figures 6 and 7. Figure 8 shows this embodiment in the first phase of production. Mixed oil and water pass into the tubing 31, through the valve 22 until production stops. At this point, the fluids are allowed to separate, the valve 22 closed, the valve 34 opened and pressure applied so as to drive water through the tubing 32 as before.

As will be appreciated, the embodiments of Figures 6 – 9 can be installed in existing wells without the need for further drilling or well construction, all of the equipment being readily available. In all cases, the fundamental approach and benefits in production are essentially the same.

## CLAIMS


- 1 A well for producing oil from an underground formation, comprising:
  - a first zone extending through the underground formation containing oil and into which formation fluids including oil are allowed to flow;
  - a second zone extending away from the first zone and into which fluids from the first zone can pass;
  - a third zone into which water passes extending away from the first zone;
  - a first valve located in the well between the first zone and the second and third zones, operable so as to allow formation fluids to pass into the second zone, and to prevent fluids from the second and/or third zones from passing into the first zone; and
  - a second valve located in the well operable to allow water to pass into the third zone, and to prevent flow of water from the third zone into the first and/or second zones.
- 2 A well as claimed in claim 1, wherein the second and third zones are defined by a vertical section of the well, at least part of which extends from above the first zone to the surface.
- 3 A well as claimed in claim 2, wherein the second zone comprises a casing or large production tubing extending from the first zone to the surface.
- 4 A well as claimed in claim 2 or 3, wherein the second zone comprises production tubing extending through an upper part of the well to the surface.
- 5 A well as claimed in claim 2, 3 or 4, wherein the third zone is defined by a tubing extending from above the first zone to the surface.
- 6 A well as claimed in claim 2, wherein the vertical section, defining the second and third zones, extends from the surface to a depth below the underground formation containing oil; the well further comprising a sidetrack, defining the

first zone, extending from the vertical section into the underground formation containing oil.


- 7 A well as claimed in claim 6, wherein the second valve is operable to prevent flow of fluid from the portion of the vertical section below the underground formation containing oil into the sidetrack or the portion of the vertical section of the well above the sidetrack.
- 8 A method of producing oil from a well as claimed in any preceding claim, comprising:
  - allowing oil and water to flow into the well from the formation surrounding the first zone into the second zone until the hydrostatic pressure of the oil and water in the well balances the formation pressure of the underground formation containing oil such that further flow into the well ceases;
  - allowing the oil and water in the second zone to separate under gravity so as to produce (i) a lower layer of water, and (ii) an upper layer of oil having its upper surface below the well surface and its lower surface above the first zone;
  - forcing the separated oil and water in the second zone back down the well and operating the first valve such that substantially no fluid is forced into the first zone, and water is forced into the third zone; and
  - allowing oil and water flow to recommence from the first zone.
- 9 A method as claimed in claim 8, wherein separated oil and water is forced down the well until the oil water interface is close to the lower end of the second zone.
- 10 A method as claimed in claim 8 or 9, wherein the steps of flowing, separating, forcing back are repeated until oil flows from the well at the surface.
- 11 A method as claimed in claim 8, 9 or 10, wherein the step of forcing separated oil and water down the well is performed by applying pressure to the second zone from the surface.

- 12 A method as claimed in claim 11, wherein pressure is applied by pumping oil or gas into the second zone.
- 13 A method as claimed in any of claims 8 – 12, wherein the separated oil and water are forced back down the well such that the water is re-injected into the underground formation below the producing formation.
- 14 A method as claimed in claim 13, wherein the re-injection is performed below the fracture pressure of the underground formation.
- 15 A method as claimed in any of claims 8 – 12, wherein the separated oil and water are forced back down the well such that the water is produced from the third zone at the surface
- 16 A method as claimed in any of claims –8 - 15, wherein the oil is pumped from the well.



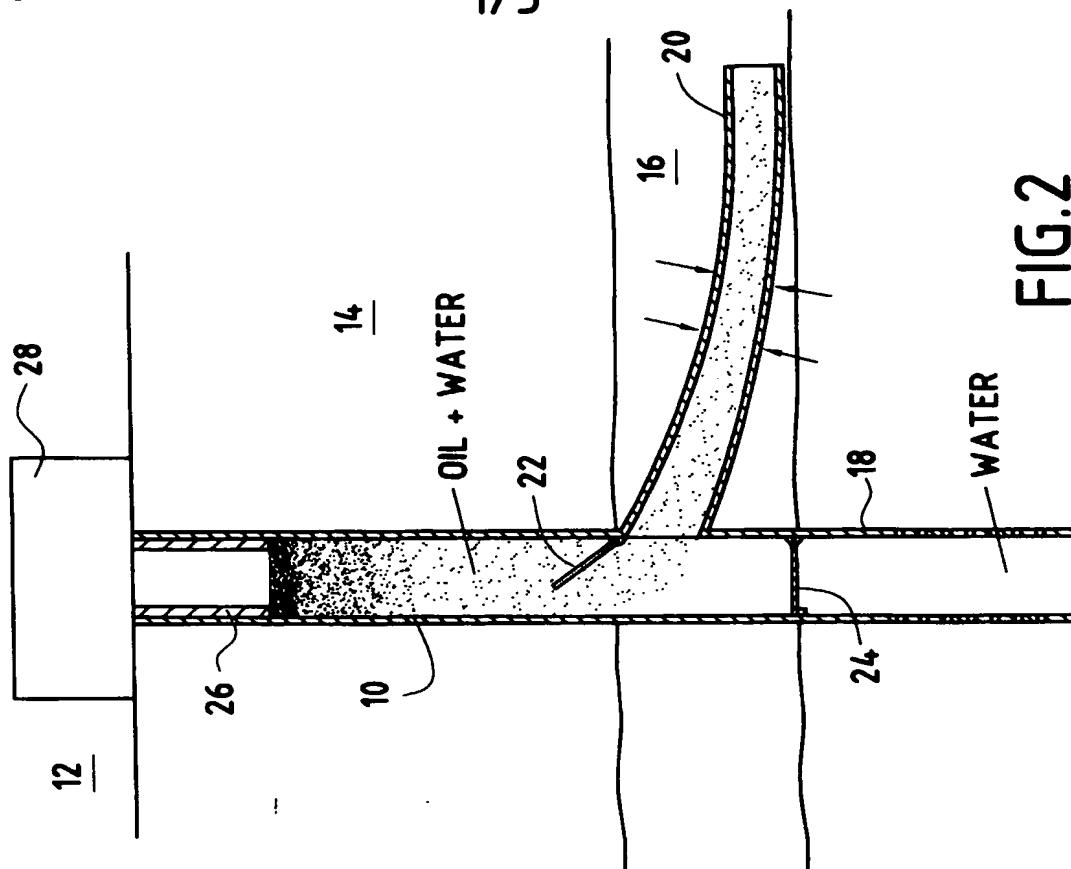

**FIG. 2**

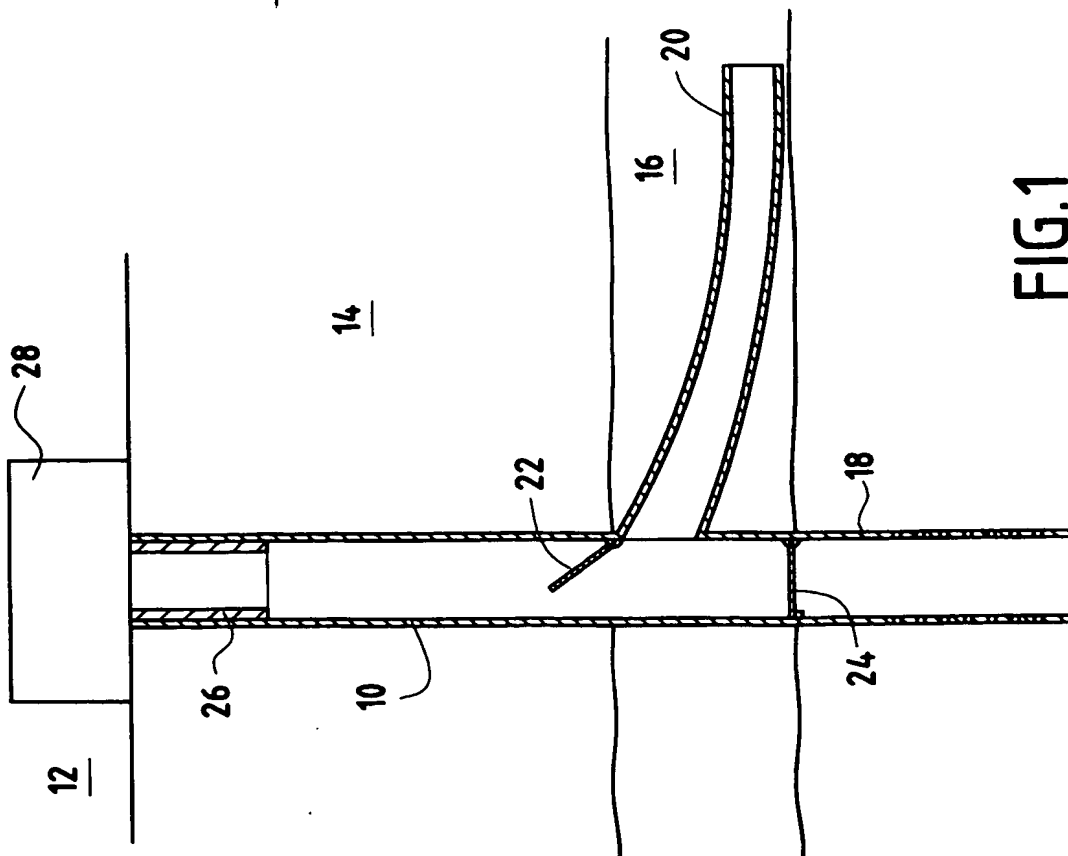

# FIG. 1

2/5

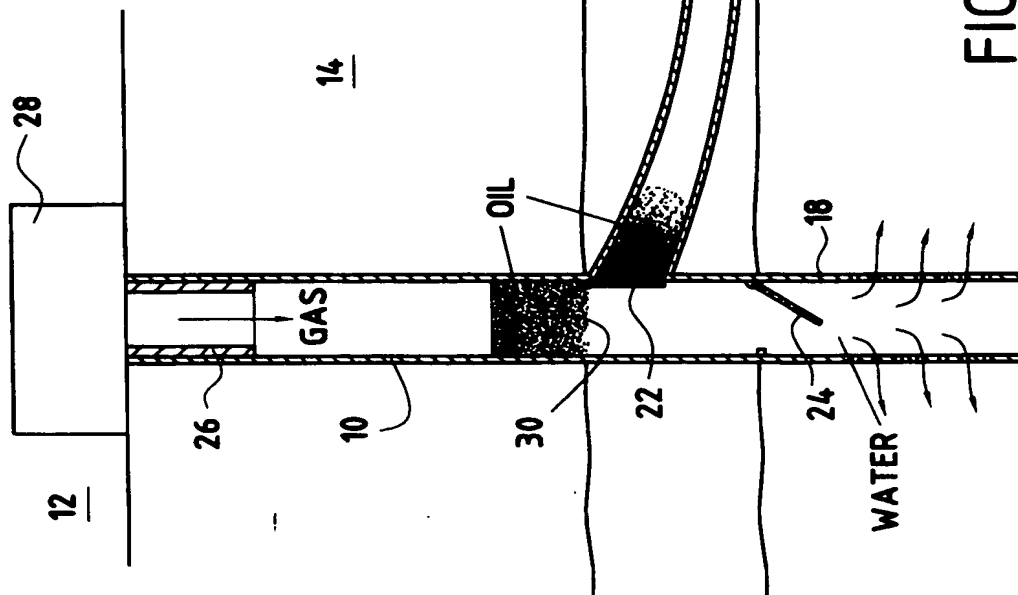


FIG. 4

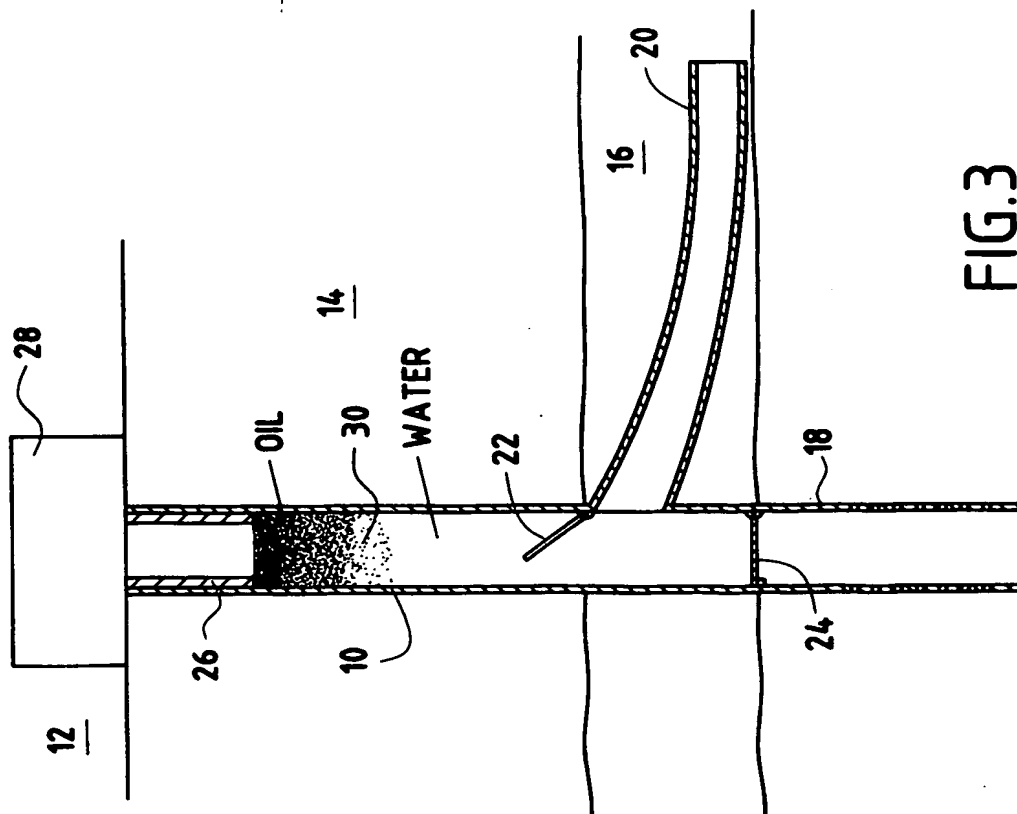


FIG. 3

3/5





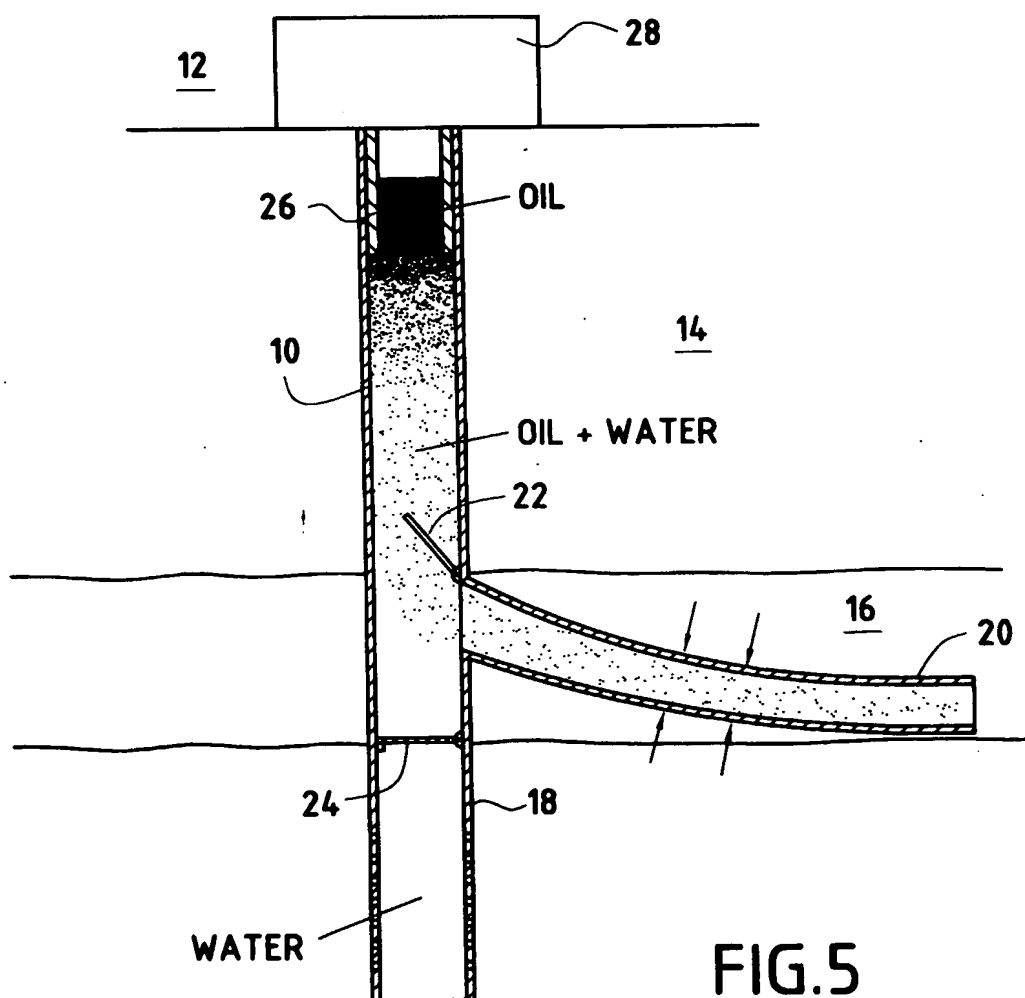


FIG.5

4/5

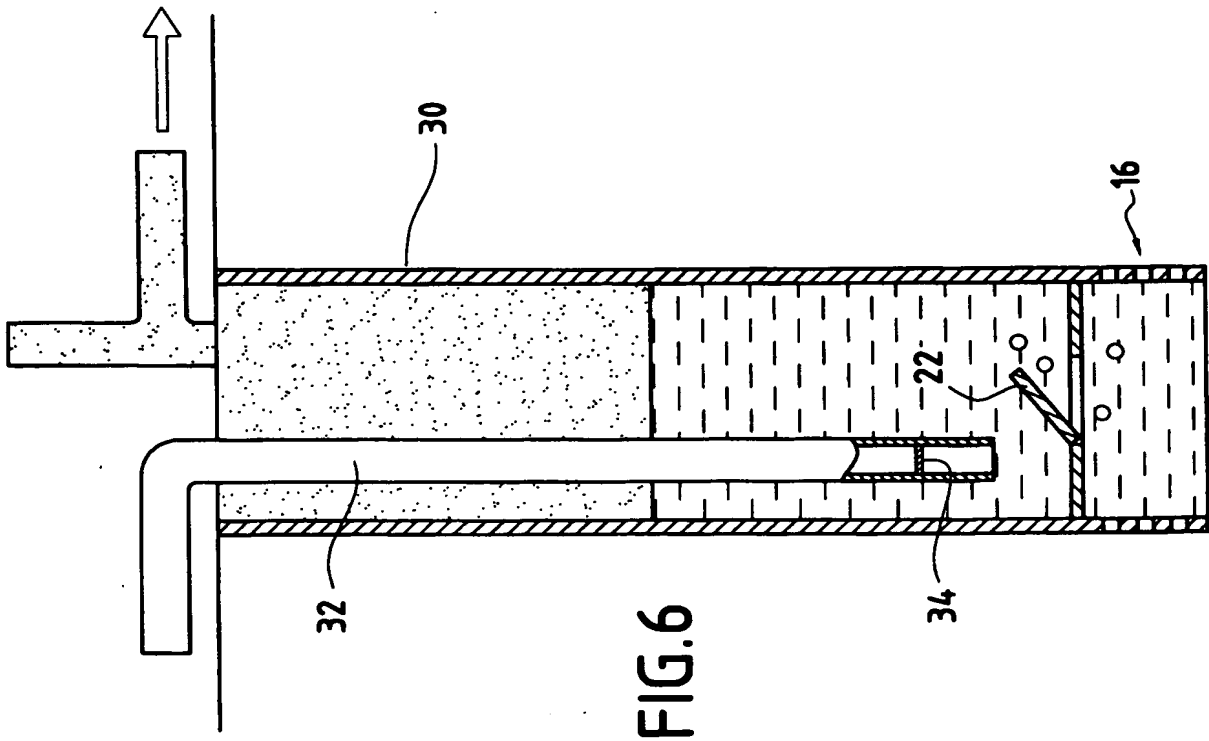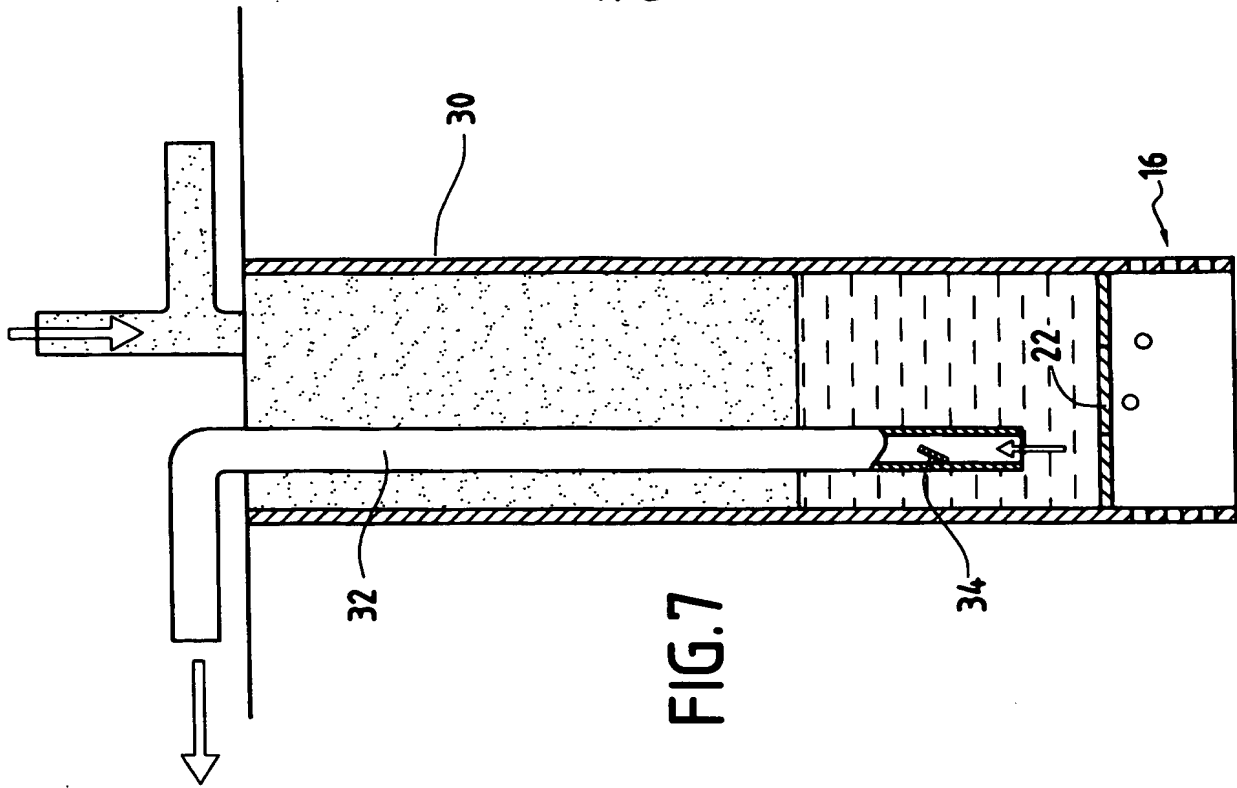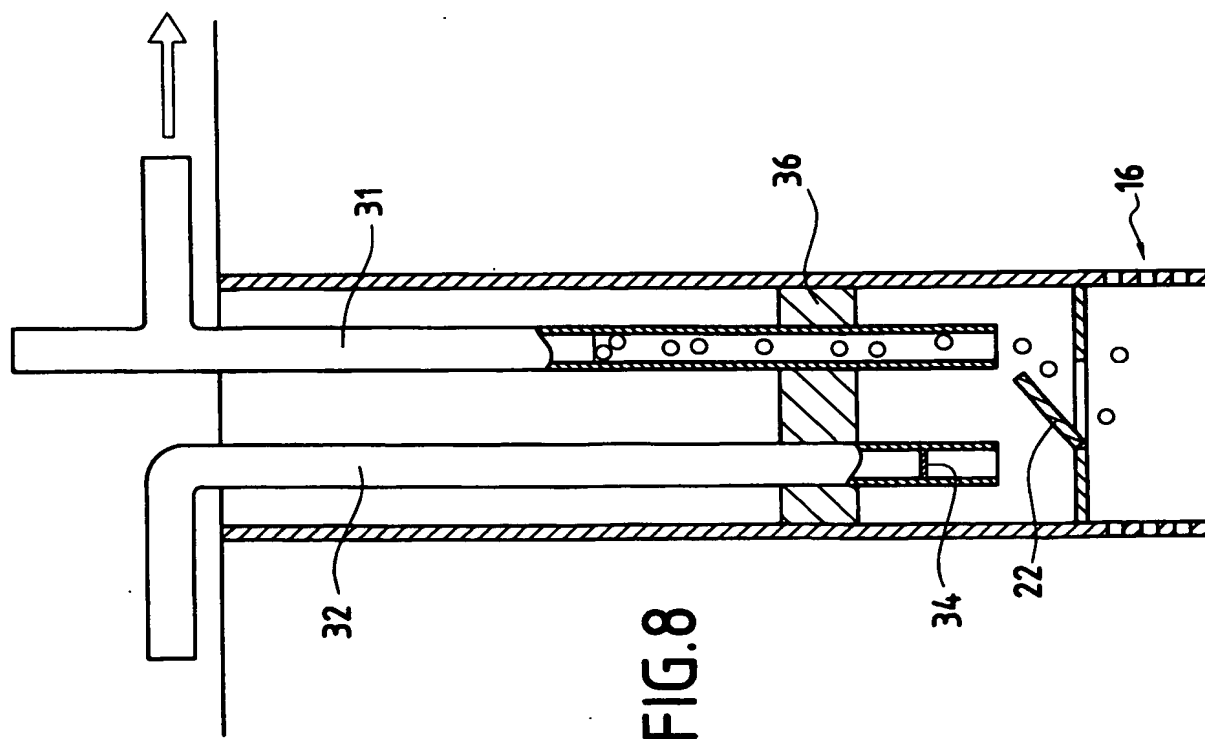

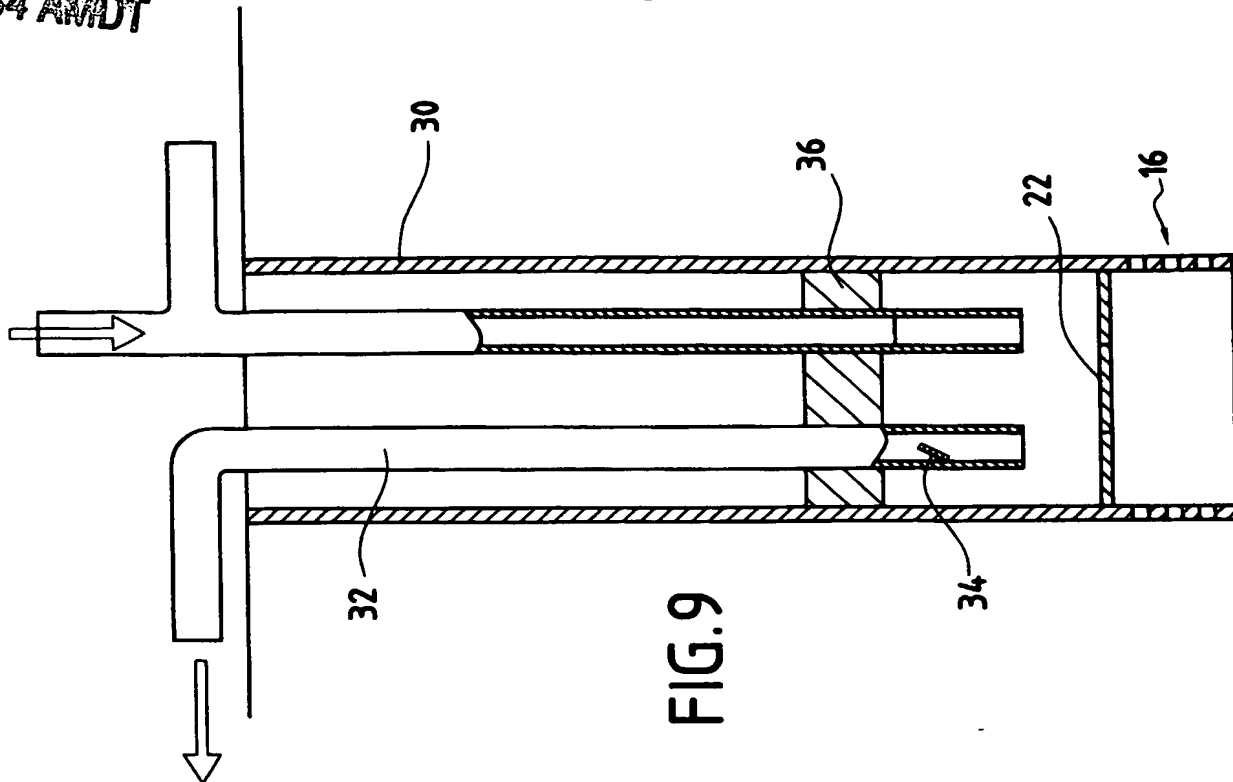

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP 03/13305

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 E21B43/38

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 873 410 A (IATO MICHEL ET AL) 23 February 1999 (1999-02-23) column 3, line 61 - column 4, line 52	1-5,8-16
Y	column 5, line 15 - line 30; figures 1,2	6,7
Y	US 6 213 208 B1 (SKILBECK FRANK) 10 April 2001 (2001-04-10) abstract; figure 2	6,7
X	US 6 196 313 B1 (SIMONS HORST) 6 March 2001 (2001-03-06) column 3, line 26 - line 42 column 5, line 7 - line 20; figure 4	1
A	US 6 336 503 B1 (CHACHULA RYAN ET AL) 8 January 2002 (2002-01-08) column 5, line 4 - line 5	1,8
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \* & \* document member of the same patent family

Date of the actual completion of the international search

1 April 2004

Date of mailing of the international search report

13/04/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Bellingacci, F

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP 03/13305

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 766 957 A (MCINTYRE JACK W) 30 August 1988 (1988-08-30) the whole document -----	1-16
A	WO 99/15755 A (BOWLIN KEVIN R ; MCKINZIE HOWARD L (US); TEXACO DEVELOPMENT CORP (US);) 1 April 1999 (1999-04-01) the whole document -----	1-16

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/13305

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5873410	A	23-02-1999	FR 2750732 A1	09-01-1998
			AT 225459 T	15-10-2002
			CA 2209515 A1	08-01-1998
			DE 69715981 D1	07-11-2002
			EP 0818603 A1	14-01-1998
			NO 973141 A	09-01-1998
			OA 10434 A	07-12-2001
US 6213208	B1	10-04-2001	AU 697376 B2	01-10-1998
			AU 6939896 A	09-04-1997
			CA 2231543 A1	27-03-1997
			DE 69608459 D1	21-06-2000
			EP 0851968 A1	08-07-1998
			WO 9711254 A1	27-03-1997
			NO 981287 A	20-03-1998
US 6196313	B1	06-03-2001	CA 2197377 A1	12-08-1998
US 6336503	B1	08-01-2002	AU 4039101 A	12-09-2001
			WO 0165065 A1	07-09-2001
			CA 2339510 A1	03-09-2001
US 4766957	A	30-08-1988	NONE	
WO 9915755	A	01-04-1999	CA 2213631 A1	22-02-1999
			US 6092599 A	25-07-2000
			US 6079491 A	27-06-2000
			US 6092600 A	25-07-2000
			US 6123149 A	26-09-2000
			US 6105671 A	22-08-2000
			US 6131660 A	17-10-2000
			AU 9571898 A	12-04-1999
			WO 9915755 A2	01-04-1999



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**